



15-Channel Handheld Transmitter

BF315

Compatible with SIRO drives:


- **EYD1624**
- EYD2524





1. Functional overview

The remote control BF315 is a radio transmitter, which can be used to manually remotely control the 24V EYD 1614 and EYD 2524 drives from SIRO.




- 1. channel display
- 2. up button
- 3. stop button
- 4. down button
- 5. channel button next
- 6. channel button back
- 7. limit button (L)
- 8. confirm button (C)
- 9. battery case

With BF315 you can control up to 14 drives individually. Use the **channel buttons** to define the channel of the respective drive before teaching-in individual drives.

Channel **AL** is reserved for the control of all connected channels, allowing you to control all drives simultaneously.

2. Installation

- 1. Turn the handheld transmitter to the back side.
- 2. Press the two plastic clips using your thumb and index finder of one hand inwards at the same time and keep them pressed firmly.
- 3. Press the battery compartment outwards using the fingernail of the thumb of your other hand.
- 4. Turn the remote control to the front and pull out the battery compartment completely.
- 5. Insert the battery into the battery compartment with the plus pole facing up.
- 6. Close the battery compartment.

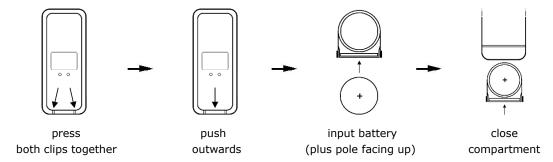

Please refer to the operation instructions of the LE-series drive you have received for the procedure of teaching-in and end position setting.

3. Technical data

| Technical data | |
|------------------------|-----------------|
| Power supply: | 3 Volt |
| Battery type: | CR2430 |
| Working current: | ≤12mA |
| Protection class: | IP 30 |
| Operating temperature: | -20°C to +60°C |
| Channels: | 15 |
| Compatibility: | SIRO EYD Series |

4. Warranty conditions

SIRO Antriebs- und Steuerungstechnik offers a 2-year warranty on new drives that have been professionally installed and properly operated in accordance with the installation instructions. The warranty covers all design faults, material defects and manufacturing faults.

Any defects occurring within the warranty period will be remedied by SIRO free of charge by supplying an equivalent or new product. Replacement delivery for warranty reasons does not result in general extensions of the original warranty period.

Any claims for compensation beyond this are excluded.